


# TRV Traverse Unit



AUTOMATION



- Electrically Operated PCB Transfer Unit
- Programmable Stroke for Input and Output Positions
- Lean Design - Optimized Footprint
- User Friendly Interface - LCD Touchscreen
- Easy Configuration
- Integrated Diagnostic Tool
- Welded Steel Frame

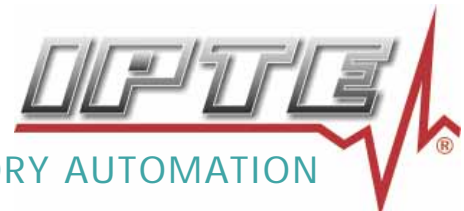

EXPERTS IN FACTORY AUTOMATION

# TRV Traverse Unit

PCB Specification	
PCB Width:	50 - 360 mm (1.97 - 14.17")
PCB Length:	50 - 460 mm (1.97 - 18.11")
PCB Thickness:	0.5 - 4 mm (0.02 - 0.15")
Height of Components (Top Side):	max. 100 mm (3.9")
Height of Components (Bottom Side):	max. 50 mm (2.0")
PCB Weight:	2.5 kg
Technical Specification	
Cycle Time:	10 sec
PCB Edge Support:	2.5 - 5 mm (0.1 - 0.2")
PCB Transport Speed:	300 mm/sec (11.8"/sec)
Transport Height:	920 ± 50 mm (36.2 ± 1.9 ")
Transport Direction:	L -> R
Traversing Stroke:	1,500 mm (59")
Position Accuracy:	± 0.3 mm (0.01")
Energy Requirements:	230 ± 10%, 50Hz - 110V ± 10%, 60 Hz - 100 VA
Compressed Air:	5-7 bar, 80 l/min, according to DIN ISO 8573 3.4.5
Color:	RAL 7035
Dimensions (L x D x H):	2,175 x 500 x 1,300 mm (85.7 x 19.7 x 51.1")
Weight:	
Control Unit:	Omron
Standards:	CE Approved
Interface:	SMEMA
Options	
Automatic Width Adjustment	
Transport Speed Adjustable	
Bus System	RS 232 / RS 485, Ethernet
SMEMA Specific	Siemens, SMPI, Fuji, Panasonic, Sanyo



#### ■ IPTE N.V.

Geleenlaan 5  
3600 Genk  
Belgium  
Tel.: +32 (0)89 623 000  
Fax.: +32 (0)89 623 010  
email: info@ipte.com

#### ■ IPTE SALES

Detailed information on our worldwide sales offices can be found on our website at [www.ipite.com](http://www.ipite.com)